


MDE Series






FEATURES


- High saturation current realized by material properties
- Low DC resistance to achieve high conversion efficiency
-
-
-


APPLICATION

-
-
-
-




Temperature rising current will cause the coil temperature approximate $\Delta T 40\text{ }^{\circ}\text{C}$
Saturation current will cause to drop approximately 30 %

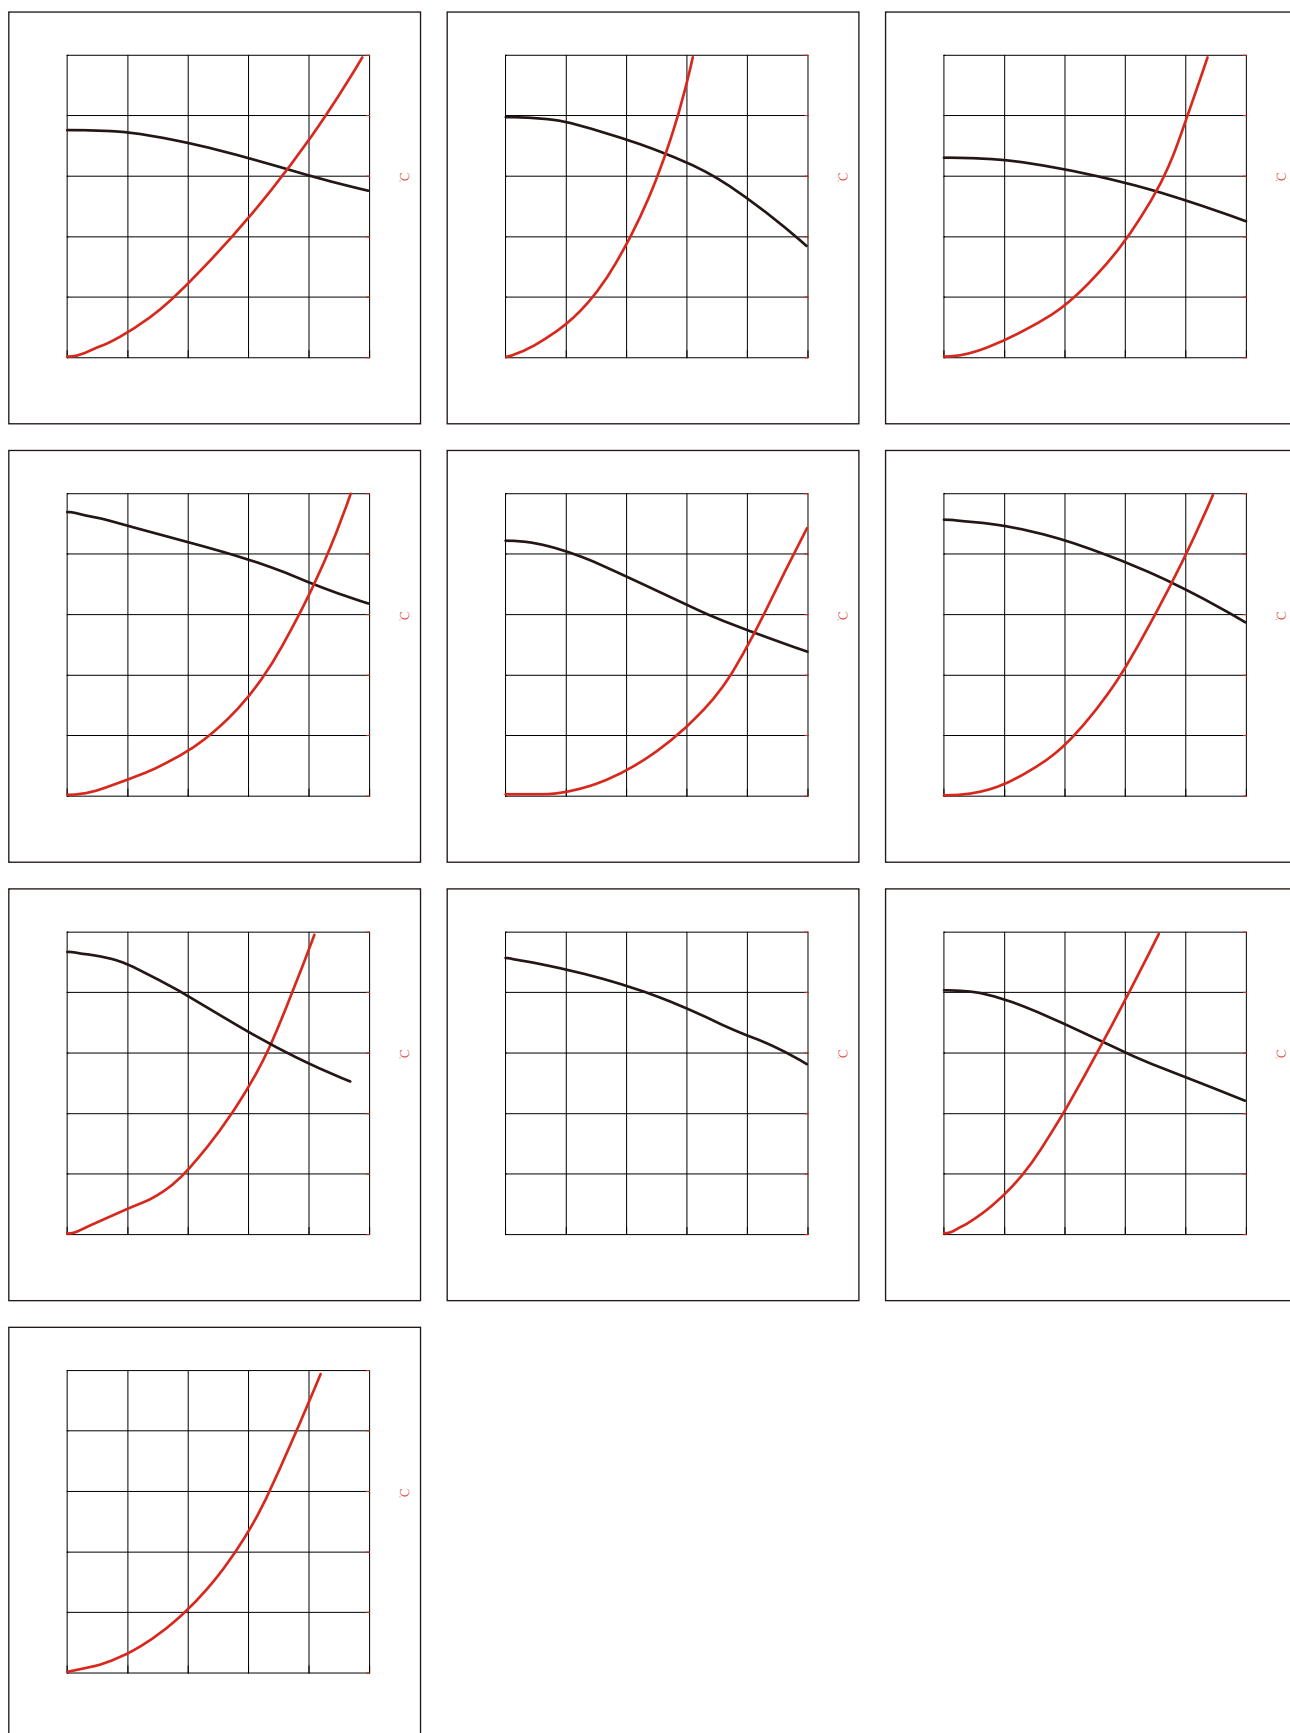


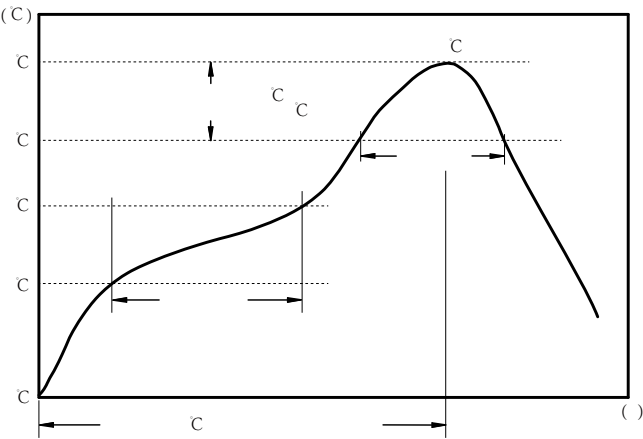

:



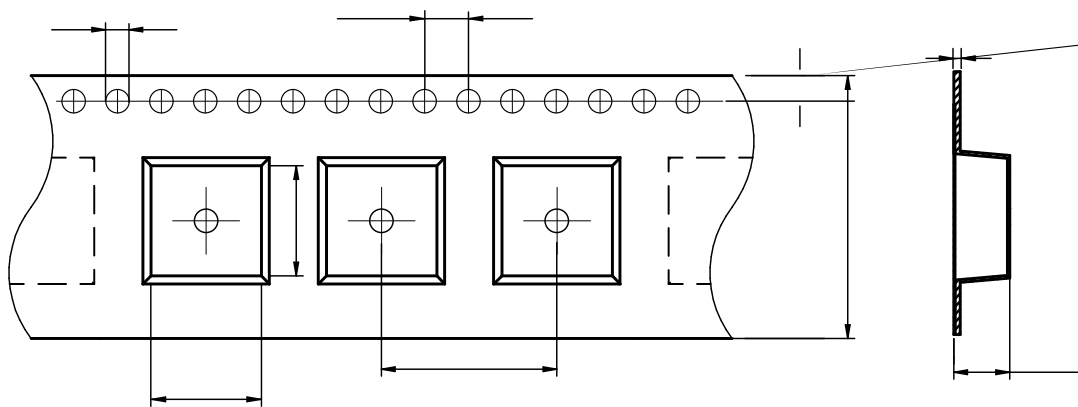


MDE252010S	2.25±0.05	2.8±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.1	1.35±0.1	1.75±0.1	0.22±0.05

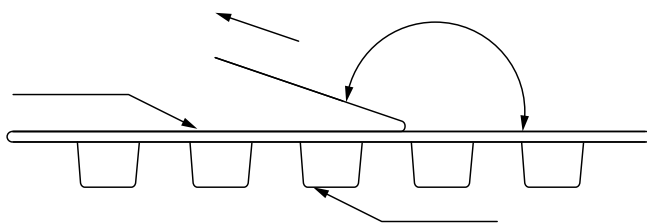

The peel force of top cover tape shall be between 0.1 to 1.3 N

:

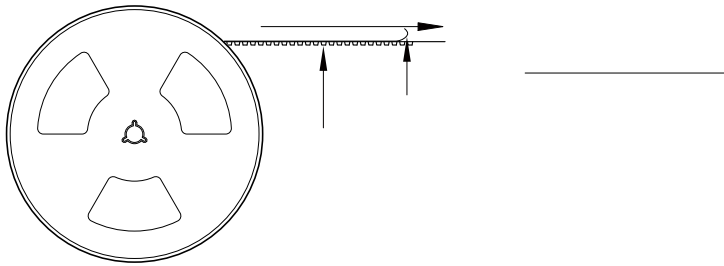

3000 Pcs/Reel

5 Reel /Inner box(15K Pcs)

8 Inner box/Carton box(120K Pcs)

:

•

•

•

•

•

•

•

•