

SCM Series



FEATURES

-
-
-
- Quantity: 2500PCS









APPLICATIONS


-
-

Marking




Part No	Inductance @ 10KHz/0.1V ±50% (μH) 1-4=2-3	Leakage Inductance @1MHz/1mA Typ. (nH) 1-4(2-3 short)	DC Resistance Max. (Ω) 1-4=2-3	Rated Current Max. (A)	Rated Voltage Typ. (V)	Impedance Typ. (Ω)		Hi-Pot (Vdc) 3mA/1S 1,4-2,3
SCM6536-100Y	10	580	0.24	0.3	80	1200	35-570	250
SCM6536-470Y	47	280	0.16	0.3	80	300	4-1600	250
SCM6536-510Y	51	270	0.16	0.3	80	300	4-1600	250
SCM6536-820Y	82	370	0.20	0.3	80	440	3-850	250
SCM6536-101Y	100	530	0.22	0.3	80	500	3-660	250
SCM6536-181Y	180	760	0.25	0.3	80	1000	3-250	250
SCM6536-221Y	220	950	0.28	0.3	80	1200	3-210	250
SCM6536-331Y	330	1300	0.30	0.3	80	2000	3-120	250

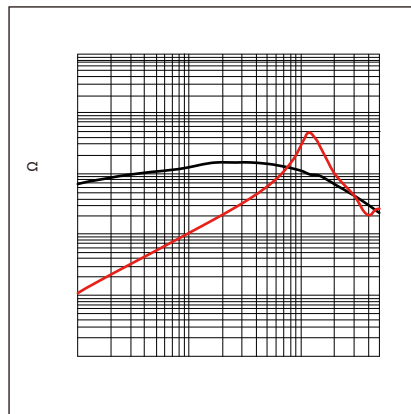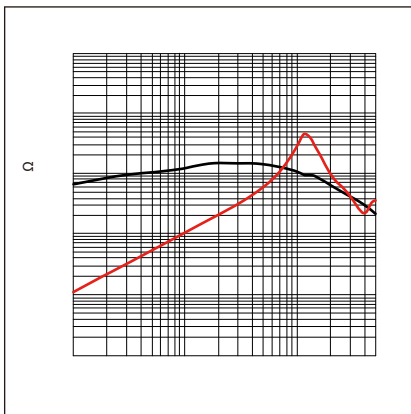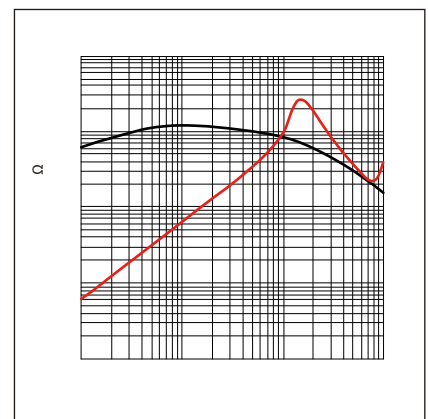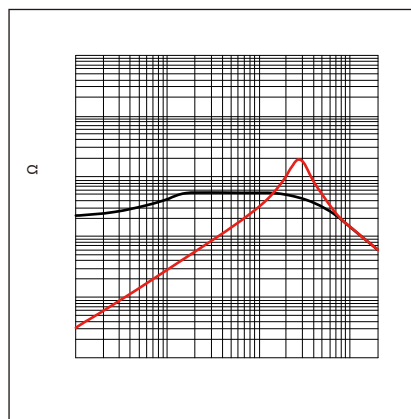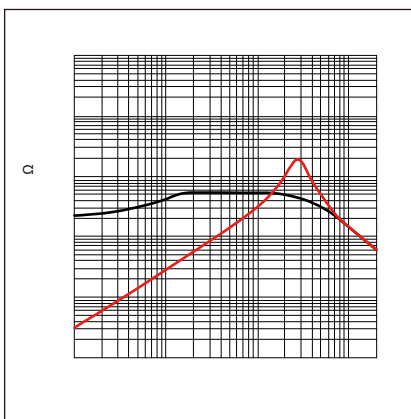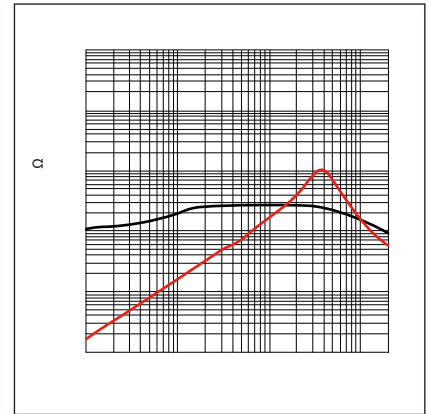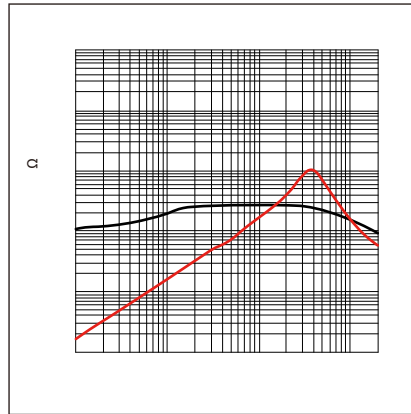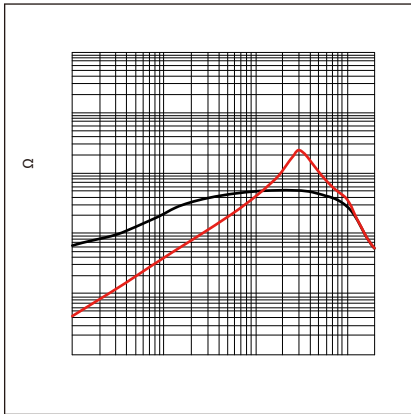

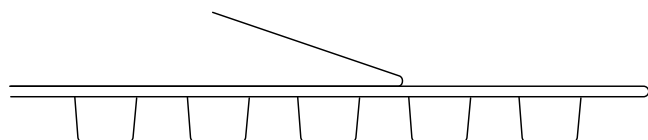

:



:

•

•

•

•

•

•

•

•

•

•

•

•

•